



HS-espagnolet DM 37,5 PZ

				L			N ^o	N ^o Tricoat
Gr. 1	zilver	745 - 1.360	400	1.300	10	5	214415 ¹⁾	223310 ¹⁾
Gr. 2	zilver	1.260 - 1.760	400	1.700	10	5	214416 ¹⁾	
Gr. 3	zilver	1.660 - 2.160	1.000	2.100	10	5	214417 ¹⁾	223312 ¹⁾
Gr. 4	zilver	2.060 - 2.560	1.000	2.500	10	5	214418 ¹⁾	223313 ¹⁾
Gr. 5	zilver	2.460 - 2.860	1.000	2.800	10	5	214419 ¹⁾	223314 ¹⁾
Gr. 6	zilver	2.860 - 3.360	1.000	3.300	10	5	215558 ¹⁾	
Gr. 7	zilver	3.260 - 3.860	1.000	3.800	10	5	215560 ¹⁾	

¹⁾ De toepassingsgebieden zijn alleen geldig bij gebruik van de vlakke looprail met geleiderail universeel laag, met kap en gelijkliggend. Bij gebruik van de bovenrail worden de toepassingsgebieden met 10 mm groter. Bij gebruik van de geleiderail C nemen de toepassingsgebieden met 10 mm toe.


Plaatsingstabel schroef

N ^o	N ^o Tricoat		1	2	3	4	5	6	7	8	9	10
214415	223310	6	137	247	527	637	1.042	1.152				
214416		6	137	247	527	637	1.042	1.152				
214417	223312	8	137	247	637	747	1.127	1.237	1.442	1.552		
214418	223313	8	137	247	637	747	1.127	1.237	1.842	1.952		
214419	223314	8	137	247	637	747	1.127	1.237	2.242	2.352		
215558		10	137	247	637	747	1.127	1.237	1.842	1.952	2.643	2.753
215560		10	137	247	637	747	1.127	1.237	2.242	2.352	3.043	3.153


Tabel met sluitingspunten

N ^o	N ^o Tricoat		Z1	Z2	Z3	Z4	Z5	
214415	223310	2	190,5	580,5				
214416		3	190,5	580,5	1.095			
214417	223312	4	190,5	690,5	1.181	1.495		
214418	223313	4	190,5	690,5	1.181	1.895		
214419	223314	4	190,5	690,5	1.181	2.295		
215558		5	190,5	690,5	1.181	1.895	2.696	
215560		5	190,5	690,5	1.181	2.295	3.096	


technische tekening

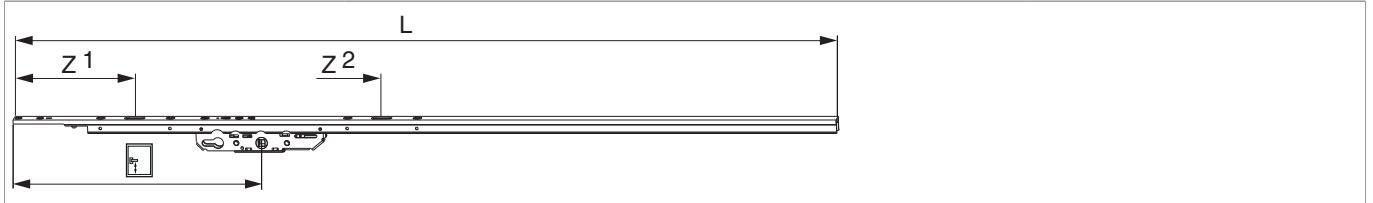


214415

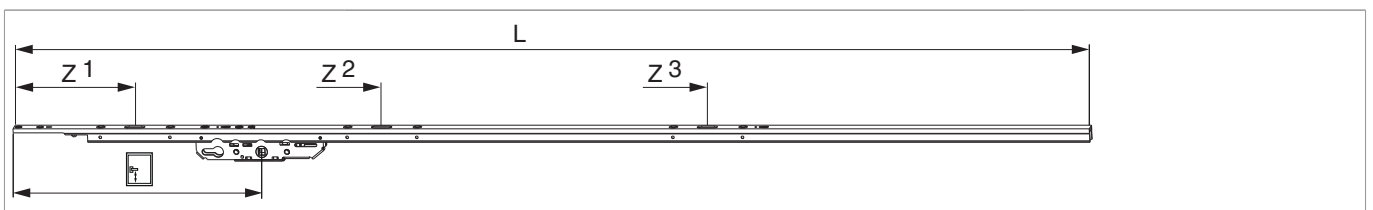

214416

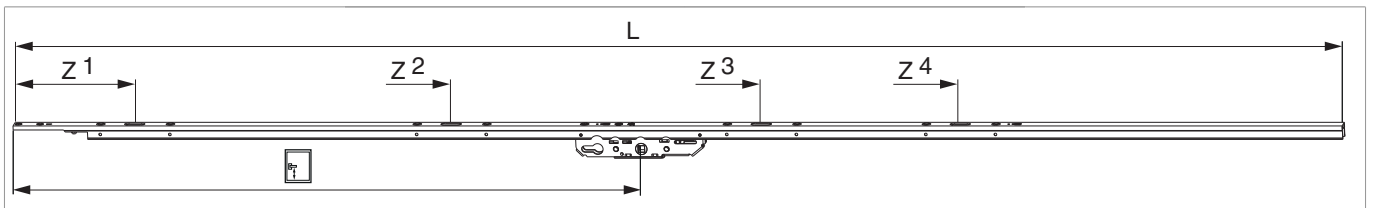

214417

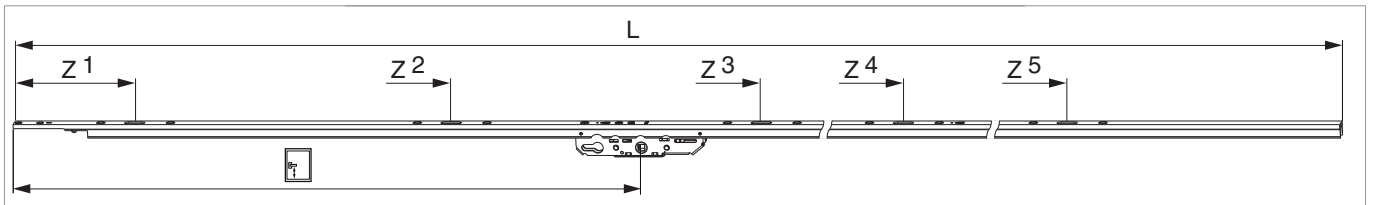

215558